

TEST REPORT

IEC TR 62778

Application of IEC TR 62778 for the assessment of blue light hazard to light sources and luminaires

Report reference No	RSZ201204554-SF				
Compiled by (+ signature)	Test Engineer: Felix Fang				
Approved by (+ signature)	Project Engineer: Harrison Huang				
Date of issue	2020-12-22				
Testing laboratory	Bay Area Compliance Laboratories Corp.(Dongguan)				
Address:	No.69, Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China				
Testing location	Same as above				
Applicant:	Hongli Zhihui Group Co., Ltd. Guangzhou Branch				
Address:	Room 316, Building 2, No.1, Xianke Yi Road, Huadong Town, Huadu District, Guangzhou, China				
Standard	IEC TR 62778:2014				
Test sample(s) received	2020-12-14				
Test in period	2020-12-15				
Procedure deviation	N.A.				
Non-standard test method:	N.A.				
Type of test object	LED Package				
Trademark:	N.A.				
Model/type reference:	HL-AS-2835D46W-2-S1-08L-PCT-HR5-SP				
Manufacturer:	Hongli Zhihui Group Co.,Ltd. Guangzhou Branch				
	Room 316, Building 2, No.1, Xianke Yi Road, Huadong Town, Huadu District, Guangzhou, China				
Rating:	Input: 2.6-3.0Vdc, 60mA				
Copy of marking plate: None					



Test item particulars:	
Product evaluated:	 LED package LED module Lamp Luminaire
Rated voltage (V):	See rating
Rated current (mA):	See rating
Rated Luminance (Mcd/m ²)	Not specified
Component report data used:	 ☑ Not applicable □ LED package □ LED module □ Lamp
Possible test case verdicts:	
-test case does not apply to the test object	
-test object does meet the requirementP(ass)	
-test object does not meet the requirementF(ail)	
General remarks:	
The test results presented in this report relate only to the object This report shall not be reproduced, except in full, without the we laboratory. "(See Enclosure #)" refers to additional information appended to "(See appended table)" refers to a table appended to the report Throughout this report a point is used as the decimal separator List of test equipment must be kept on file and available for rev Remark: Appendix A EUT photos	vritten approval of the Issuing testing o the report. t.
General product information:	
"EUT" as referred in this report is LED Package.	



Clause

Report No.: RSZ201204554-SF

Verdict

Requirement + Test Result - Remark

7 **MEASUREMENT INFORMATION FLOW** Ρ 7.1 **Basic flow** Ρ Ρ 'Law of conservation of luminance' applied Use of only true luminance/radiance values Ρ In case of luminaire: Ρ The light source is operated in the luminaire under similar conditions as when tested as a component In case E_{thr} value for RG2 was established the peak Ν value was derived from angular light distribution 7.2 Ρ Conditions for the radiance measurement Р Standard condition applied (200mm distance, 0,011rad field of view) Non-standard condition applied Ν 7.3 Special cases (I): Replacement by a lamp or LED module of another type Ν Light source is a white light source Ν Evaluation done based on highest luminance Ν Evaluation done based on CCT value Ν 7.4 Special cases (II): Arrays and clusters of primary light sources Ν RG0 unlimited LED package is evaluated as: Ν RG1 unlimited RG2 unlimited Ethr of LED package applies to array Ν **RISK GROUP CLASSIFICATION** Ρ 8 Risk group achieved: Ρ **Risk Group 0 unlimited** Ν Ρ **Risk Group 1 unlimited Risk Group 2 unlimited** Ν Ρ E_{thr} (lx) : 3655 Distance to reach RG1(mm) : 49



Clause

Report No.: RSZ201204554-SF


IEC -	ΓR	627	78

Requirement + Test

Result - Remark Verdict

	TABLE: Spectrora	diomet	ric measure	ment	ł		Р	
	Measurement performed on:				 ☑ LED package □ LED module □ Lamp □ Luminaire 			
	Model number			HL-AS-2835D46W-2-S1-08L-PCT- HR5-SP				
	Test voltage (V)			. 2.6-3.0Vdc		_		
	Test current (mA)				- 60 mA		_	
	Test frequency (Hz)							
	Ambient, t (°C)				20.7°C —		_	
	Measurement distance				⊠ 20 cm			
	Source size					. □ Non-small: mm ⊠ Small: 1.7mm		
	Field of view					. ☐ 100 mrad ☐ 11 mrad ⊠ 8.3 mrad (for small sources)		
	Item	Symb ol	Units		Result	Remark		
Correlated colour temperature		ССТ	к	301	2			
x/y colour coordinates		x/y		0.4405 / 0.4129				
Blue light hazard radiance		L _B	W/(m ² •sr ¹)	6.223 x 10 ²				
Blue light hazard irradiance		E _B	W/m ²	6.123 x 10 ⁻²				
Luminance		L _V	cd/m ²	2.274 x 10 ⁶				
Illuminance		E	lx	224				
Supplementary information: NA								



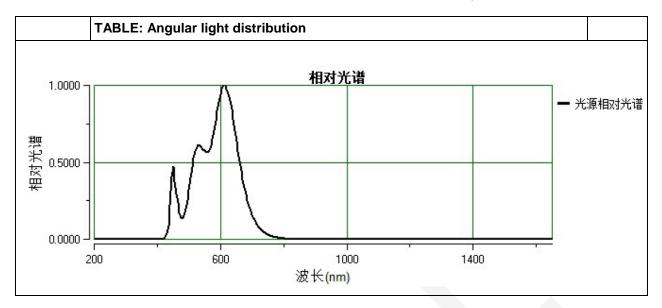



Appendix A - EUT Photos

EUT- The overall view





DIRECTIONS

- 1. The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report.
- 2. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.
- 3. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
- 4. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.
- 5. This report cannot be reproduced except in full, without prior written approval of the Company.
- 6. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

End of report